

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
16 December 2004 (16.12.2004)

PCT

(10) International Publication Number  
**WO 2004/109992 A1**

(51) International Patent Classification<sup>7</sup>: **H04L 12/56**,  
12/28, G06F 19/00, A61B 5/00

(21) International Application Number: **PCT/IB2004/050785**

(22) International Filing Date: 27 May 2004 (27.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
03101659.5 6 June 2003 (06.06.2003) EP

(71) Applicant (for DE only): **PHILIPS INTELLECTUAL PROPERTY & STANDARDS GMBH [DE/DE]**; Stein-damm 94, 20099 Hamburg (DE).

(71) Applicant (for all designated States except DE, US): **KONINKLIJKE PHILIPS ELECTRONICS N. V.**

(72) Inventors; and


(75) Inventors/Applicants (for US only): **KLABUNDE, Karin [DE/DE]**; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE). **MUESCH, Guido [DE/DE]**; c/o Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(74) Agent: **VOLMER, Georg**; Philips Intellectual Property & Standards GmbH, Weisshausstr. 2, 52066 Aachen (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

*[Continued on next page]*

(54) Title: METHOD OF CONTROLLING WIRELESS DATA TRANSMISSION BY SWITCHING BETWEEN SHORT-RANGE AND LONG-RANGE RADIO TECHNOLOGIES

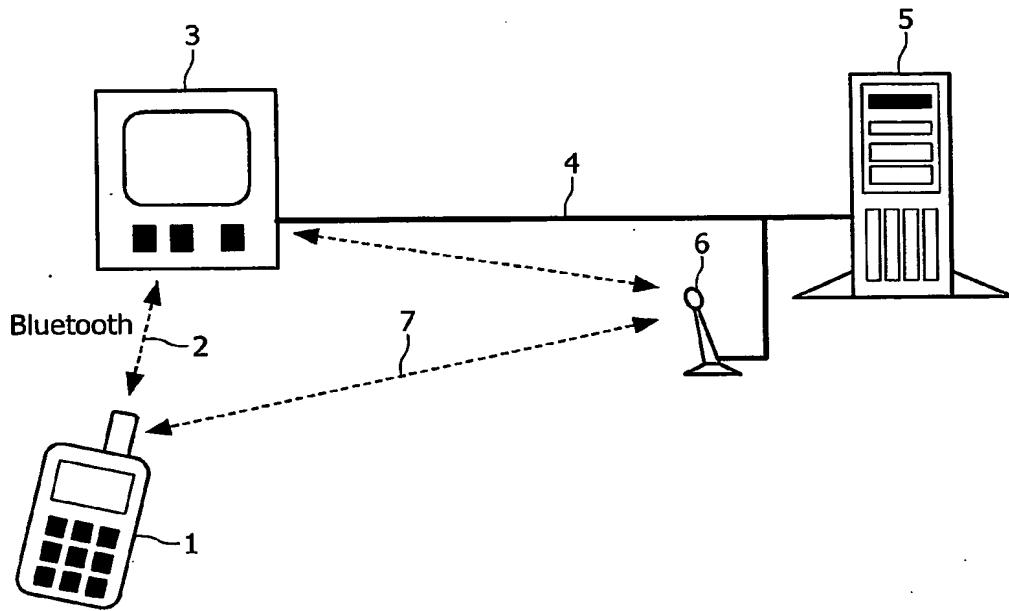

**WO 2004/109992 A1**

(57) Abstract: The invention relates to a device, in particular a patient monitoring system with a mobile terminal unit (1) for acquiring patient data. The measured data is transferred from the terminal unit (1) via a short-range radio technology (2) (e.g. Bluetooth) to a data monitor (3) arranged at the patient's bedside when the patient is in the vicinity thereof. If necessary, communication can be switched to a long-range radio technology (7) (e.g. WLAN) to ensure interruption-free data transmission while the patient moves around.



TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**Published:**

— with international search report